


ZICO[®] 3030PM21

REV. 10-27-17

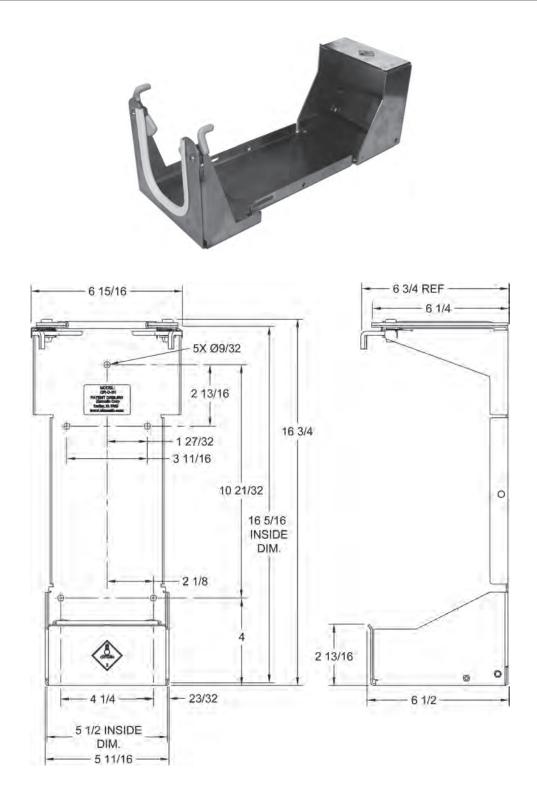

		WT./@
MODEL	DESCRIPTION	IN LBS.
QR-D-3/H	Horizontal Strapless Cylinder Bracket for All-In-One Regulators	6.35

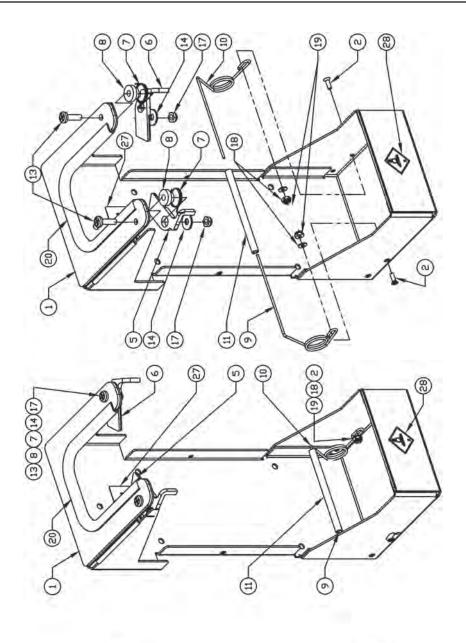

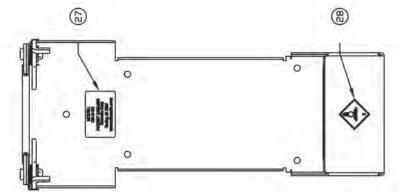

ITEM	PART NO.	DESCRIPTION	QTY.
1	3030-110-101	D/JUMBO D-CYLLARGE REGULATOR	1
2	9110-361608	#8 x 1/2" FLAT HD, SOCKET HD. S.S.	2
5	3030-113-109	D-CYL. BRACKET CAM (LEFT)	1
6	3030-113-111	D-CYL. BRACKET CAM (RIGHT)	1
7	3030-113-113	D-CYL. BRACKET CAM SPRING	2
8	3030-113-115	D-CYL. BRACKET CAM SPACER	2
9	3030-113-117	D-CYL. BRACKET RETURN SPRING RH	1
10	3030-113-119	D-CYL. BRACKET RETURN SPRING LH	1
11	3030-113-121	D-CYL. BRACKET SPRING JACKET	1
13	9110-352514	BUTTON HD CAP, 1/4"-20 X 7/8 S.S.	2
14	9114-112500	WASHER, 1/4" FLAT S.S.	2
17	9113-172500	LOW PRO. NUT, 1/4-20, NYLOCK S.S.	2
18	9114-111700	#8 FLAT WASHER, NARROW S.S.	2
19	9113-191700	LOW PRO. NUT, #8, NYLOCK S.S.	2
20	3030-110-105	EDGE GUARD, VINYL	1
27	3030-110-131	LABEL, PATENT#, QR-D-3	1
28	3030-112-117	LABEL, OXYGEN WARNING	1

Operating Instructions

To store standard, jumbo, and steel "D" cylinders:

- 1. Place bottom of cylinder against Return Spring Assembly (9, 10, & 11).
- 2. Lower cylinder through the bracket cams (3 & 4), until both click into the locked position.
- 3. Check that the cylinder is now secure against the latches.

To remove cylinders:

- 1. Slightly press cylinder against the D-Cyl. Bracket Form (1) to relieve pressure on the latch.
- 2. Squeeze bracket cams (3 & 4) inward, toward each other, to disengage the latches.
- 3. Lift the cylinder free of the bracket cams and remove from bracket.

Mounting Instructions

- Mount horizontally.
- Brackets may be mounted side by side.
- Minimum of 5 mounting points using 1/4" screws.
- Mounting surface must be able to withstand a pull-out force exceeding strength of screws.

