

QUIC-STEP® MANUAL VEHICLE STEP MODEL MPOS-24 PARTS AND INFORMATION MANUAL



The stepping surface is 24" wide x 9.5" deep. The surface is a non-skid surface to provide traction and safety. Also, it allows mud and debris to fall through rather than stay on the stepping surface.





The MPOS-24 only requires 26.375" wide x 15" deep mounting surface allowing it to fit almost anywhere.

The MPOS-24 is designed to sustain a static load of 500 lbs. This should be taken into account in determining strength required of mounting surface.

Meets NFPA 1901-09 requirements.


MODEL NO.	DESCRIPTION	WT./@ IN LBS.
MPOS-24	Manual Vehicle Step	36.00

Maintenance: Semi-Annually lubricate all joints and pivots with CRC Stor & Lube long-term lubricant and rust preventative # 03032. Excess lubrication should be wiped off.

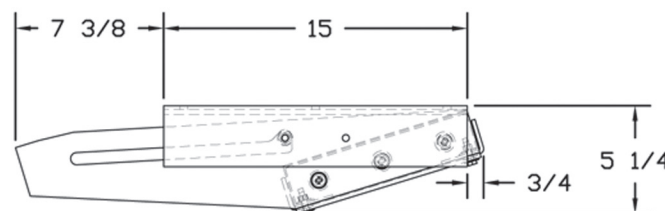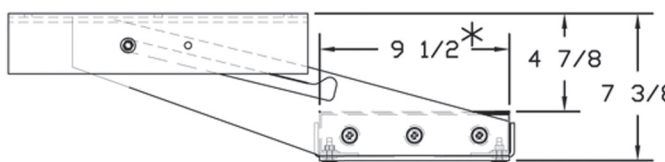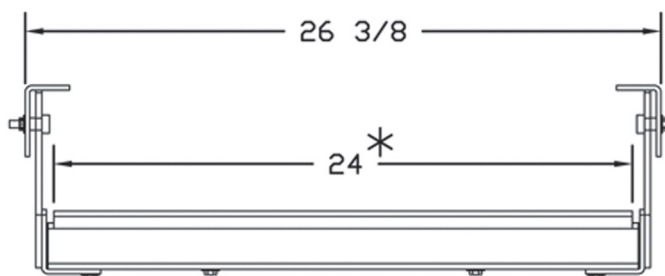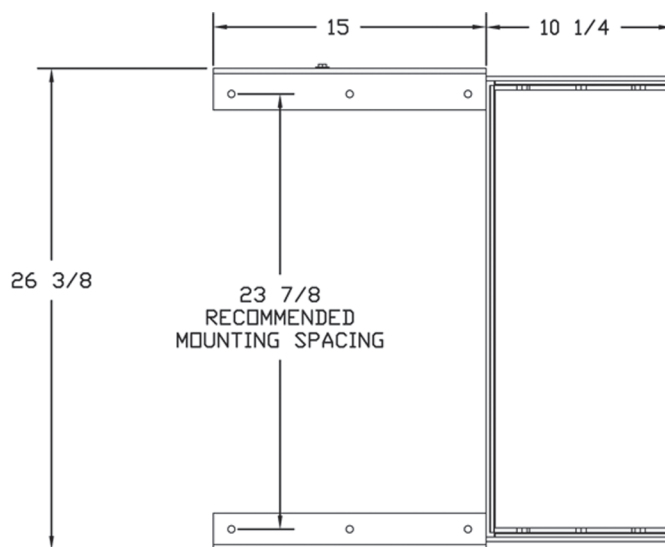

*Stepping surface

Parts Breakdown

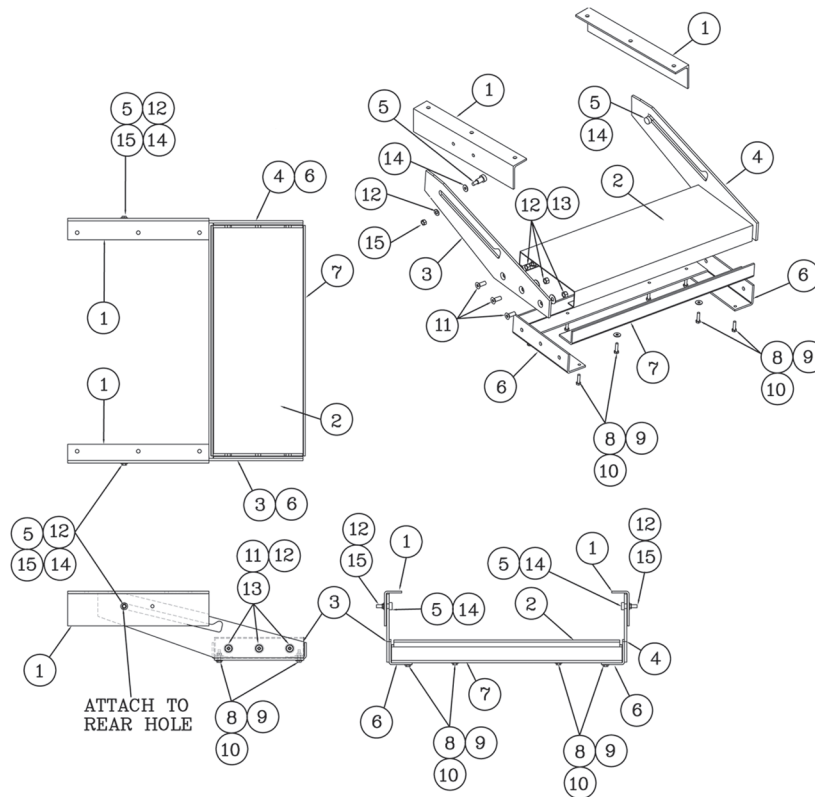

ITEM	PART NO.	DESCRIPTION	QTY.
1	3094-110-101	Pull-Out Step Guide	2
2	3094-110-111	24" Grating	1
3	3094-110-109	Grating Rail, Left	1
4	3094-110-107	Grating Rail, Right	1
5	3030-160-115	Shoulder Bolt, w/Washer	2
6	3094-110-105	Grating Cap Short	2
7	3094-110-103	Grating Cap Long	2
8	9015-102516	1/4"-20 x 1" Hex Screw	8
9	9014-112500	1/4" Washer	4
10	9015-172500	1/4"-20 Nylock Nut	8
11	9010-163716	3/8-16 x 1" Ph Hd Screw	6
12	See Item 5	Flat Washer, provided with Bolt	2
13	9013-173700	3/8"-16 Nylock Nut	6
14	9014-115000	1/2" I.D. USS Flat Washer	2
15	9018-173700	Locknut, Nylon 3/8"-16, GR8	2
16	3094-110-117	Notice Label	1

NOTICE:

TRACK AND SHOULDER BOLT
SHOULD BE ROUTINELY
LUBRICATED WITH GREASE.



Ziamatic Corp.

10 West College Avenue, P.O. Box 337, Yardley, PA 19067-0587 • (215) 493-3618 • FAX: (215) 493-1401

*ZICO is a registered trademark for fire, safety and marine products made by Ziamatic Corp.

Copyright Ziamatic Corp. 3-16